

11-17-2020

A PMBLDC Motor Measurement and Control System Available for ZYNQ Hardware-in-the-loop simulation

Zhiguo Zhou

School of Information and Electronics, Beijing Institute of Technology, Beijing 100081, China;

Jiaen Sun

School of Information and Electronics, Beijing Institute of Technology, Beijing 100081, China;

Jiabao Yu

School of Information and Electronics, Beijing Institute of Technology, Beijing 100081, China;

Xuehua Zhou

School of Information and Electronics, Beijing Institute of Technology, Beijing 100081, China;

Follow this and additional works at: <https://dc-china-simulation.researchcommons.org/journal>



Part of the Artificial Intelligence and Robotics Commons, Computer Engineering Commons, Numerical Analysis and Scientific Computing Commons, Operations Research, Systems Engineering and Industrial Engineering Commons, and the Systems Science Commons

This Paper is brought to you for free and open access by Journal of System Simulation. It has been accepted for inclusion in Journal of System Simulation by an authorized editor of Journal of System Simulation.

A PMBLDC Motor Measurement and Control System Available for ZYNQ Hardware-in-the-loop simulation

Abstract

Abstract: In order to solve the modeling of permanent magnet brushless dc(PMBLDC) motor, it is difficult to modify the control algorithm, inconvenient to add and remove the closed loop, and has poor real-time measurement and control capability. Based on hall sensor position detection algorithm and PID control algorithm, *combined with piecewise linear method to generate PWM waveform*, Simulink graphical modeling platform is used, and a new closed-loop measurement and control method is proposed. A sudden load and sudden speed simulation are carried out to verify the established PMBLDC motor measurement and control system. The simulation results show that the system has great stability. It is easy to modify and delete the algorithm module, and it can be quickly deployed in the hardware platform. Simulink provides graphical interface for measuring and controlling the hardware-in-the-loop real-time simulation.

Keywords

Simulink, permanent magnet brushless dc(PMBLDC) motor, hall sensor position detection algorithm, PID control algorithm, piecewise linear method, PWM

Recommended Citation

Zhou Zhiguo, Sun Jiaen, Yu Jiabao, Zhou Xuehua. A PMBLDC Motor Measurement and Control System Available for ZYNQ Hardware-in-the-loop simulation[J]. Journal of System Simulation, 2020, 32(11): 2121-2128.

A PMLDC Motor Measurement and Control System Available for ZYNQ Hardware-in-the-loop simulation

Zhou Zhiguo, Sun Jiaen, Yu Jiabao, Zhou Xuehua

(School of Information and Electronics, Beijing Institute of Technology, Beijing 100081, China)

Abstract: In order to solve the modeling of permanent magnet brushless dc(PMLDC) motor, it is difficult to modify the control algorithm, inconvenient to add and remove the closed loop, and has poor real-time measurement and control capability. Based on hall sensor position detection algorithm and PID control algorithm, combined with piecewise linear method to generate PWM waveform, Simulink graphical modeling platform is used, and a new closed-loop measurement and control method is proposed. A sudden load and sudden speed simulation are carried out to verify the established PMLDC motor measurement and control system. The simulation results show that the system has great stability. It is easy to modify and delete the algorithm module, and it can be quickly deployed in the hardware platform. Simulink provides graphical interface for measuring and controlling the hardware-in-the-loop real-time simulation.

Keywords: Simulink; permanent magnet brushless dc(PMLDC) motor; hall sensor position detection algorithm; PID control algorithm; piecewise linear method; PWM

一种可用于 ZYNQ 硬件在环仿真的永磁无刷直流电机测控系统

周治国, 孙佳恩, 于家宝, 周学华

(北京理工大学信息与电子学院, 北京 100081)

摘要: 为解决永磁无刷直流电机(permanent magnet brushless dc, PMLDC)建模仿真存在着修改控制算法困难、添加和删除闭环不方便、实时测控能力较差等问题。利用 Simulink 图形化建模平台,基于霍尔传感器位置检测算法和 PID 控制算法,结合分段线性法生成 PWM 波形,提出了一种新型的闭环测控方法,对所建立的 PMLDC 电机测控系统进行了突增负载和突增转速的仿真测试。仿真结果证明该系统具有很好的稳定性,可快速部署在 ZYNQ 平台进行调试,同时 Simulink 提供了可供硬件在环实时仿真测控的图形化界面。

关键词: Simulink; 永磁无刷直流电机; 霍尔传感器位置检测算法; PID 控制算法; 分段线性法; PWM

中图分类号: TP391.9

文献标识码: A

文章编号: 1004-731X (2020) 11-2121-08

DOI: 10.16182/j.issn1004731x.joss.20-FZ0485E

Introduction

PMLDC motor has been developing rapidly in



Received date: 2020-05-30 Revised date: 2020-07-18;
Foundation: Equipment Pre-Research Field Fund Thirteen Five-year(61403120109);
Biographies: Zhou Zhiguo(1977-), Male, Hubei Wuhan, Doctor, Associate Professor, research direction: the simulation method and application; Sun Jiaen(1996-), Male, Inner Mongolia Hohhot, Master.

recent years and has attracted much attention due to its small size, good performance, simple structure, high reliability and high output torque. With the continuous expansion of PMLDC motor applications, it is of great significance to develop a higher standard motor control system. In the development process of motor measurement and control, good control performance, easy to be deployed on hardware

<http://www.china-simulation.com>

• 2121 •

platform and quick development cycle should be focused [1-3]. Therefore, how to build a high efficiency simulation model of PMBLDC motor control system is urgent.

The research of PMBLDC motor modeling and simulation method is an extremely important process, but there are still some problems, such as taking up too much computing resources, poor real-time performance, difficulty in modifying the control algorithm and inconvenience in adding and removing the closed loop [3]. This paper puts forward a new kind of PMBLDC motor modeling method based on Simulink graphical modeling platform. We established the motor module, the speed controller module, the 3-phase inverter module, the piecewise linear PWM generator module and the core controller module respectively. These modules are combined to build a complete PMBLDC motor simulation model. In the process, how to quickly determine PWM with different duty cycle is very important, which has been solved successfully according to the piecewise linear method. In addition, the modular designed blocks also make it easy to modify, add and subtract algorithms. The model established by this method can be quickly and conveniently downloaded into FPGA and ARM platform for joint debugging by using the embedded plug-ins of Simulink, which greatly improves the development efficiency of designers.

1 Modeling of PMBLDC motor

The equivalent circuit of PMBLDC motor drive for phase A shown in below Fig. 1 [4].

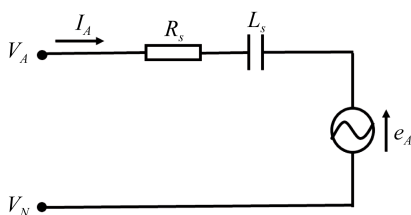


Fig. 1 Equivalent circuit of PMBLDC Motor

We can get the voltage from:

$$V = I_A \cdot R_s + L_s \cdot \frac{dI_A}{dt} + e_A \quad (1)$$

Where, L_s is the inductance, e_A is back emf of the motor and R_s is the stator winding resistance for phase A.

We can get these conclusions by applying KVL [4],

$$V_a = R_a I_a + L_a \frac{dI_a}{dt} + M_{ab} \frac{dI_b}{dt} + M_{ac} \frac{dI_c}{dt} + e_a \quad (2)$$

$$V_b = R_b I_b + L_b \frac{dI_b}{dt} + M_{ba} \frac{dI_a}{dt} + M_{bc} \frac{dI_c}{dt} + e_b \quad (3)$$

$$V_c = R_c I_c + L_c \frac{dI_c}{dt} + M_{ca} \frac{dI_a}{dt} + M_{cb} \frac{dI_b}{dt} + e_c \quad (4)$$

Where, I_a , I_b and I_c are three phase currents. V_a , V_b and V_c are three phase voltages. L_a , L_b and L_c are three phase self inductances. R_a , R_b and R_c are three phase resistances. M_{ab} , M_{ac} , M_{ba} , M_{bc} , M_{ca} and M_{cb} are the mutual inductances of the stator windings. What's more, e_a , e_b and e_c are the back emfs in motor.

So we can get the matrix form,

$$\begin{bmatrix} V_a \\ V_b \\ V_c \end{bmatrix} = \begin{bmatrix} R_a & 0 & 0 \\ 0 & R_b & 0 \\ 0 & 0 & R_c \end{bmatrix} \begin{bmatrix} I_a \\ I_b \\ I_c \end{bmatrix} + \begin{bmatrix} L_a & M_{ab} & M_{ac} \\ M_{ba} & L_b & M_{bc} \\ M_{ca} & M_{cb} & L_c \end{bmatrix} \frac{d}{dt} \begin{bmatrix} I_a \\ I_b \\ I_c \end{bmatrix} + \begin{bmatrix} e_a \\ e_b \\ e_c \end{bmatrix} \quad (5)$$

The equation of electromagnetic torque is,

$$T_e = (e_a I_a + e_b I_b + e_c I_c) / \omega \quad (6)$$

The equation of motion is,

$$T_e = j \frac{d\omega}{dt} + B\omega + T_l \quad (7)$$

2 The architecture of PMBLDC motor measurement and control system

In this part, we propose the method of establishing the BLDC control system simulation model based on the analysis of hall sensor position

detection algorithm and PID control algorithm. In addition, the method combines with the idea of piecewise linear to generate PWM waveform. The model is built in the Simulink environment of Matlab2018b and SimPowerSystem Toolbox are used. The framework of this system is shown in Fig. 2.

The complete model of the whole motor measurement and control system is shown in Fig. 3. In addition to the motor and load, there are speed control module, piecewise linear PWM generation module, core control module and 3-phase inverter module. This system adopts speed closed-loop PID control algorithm and the modulation mode of PWM is HPWM-LON.

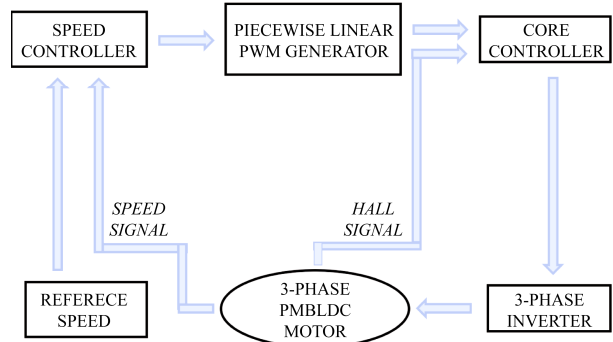


Fig. 2 Block diagram of the system

2.1 Speed controller

The structure of the speed control module is relatively simple, and shown as Fig. 4.

Dual input: reference speed and actual speed.

Single output: speed deviation value.

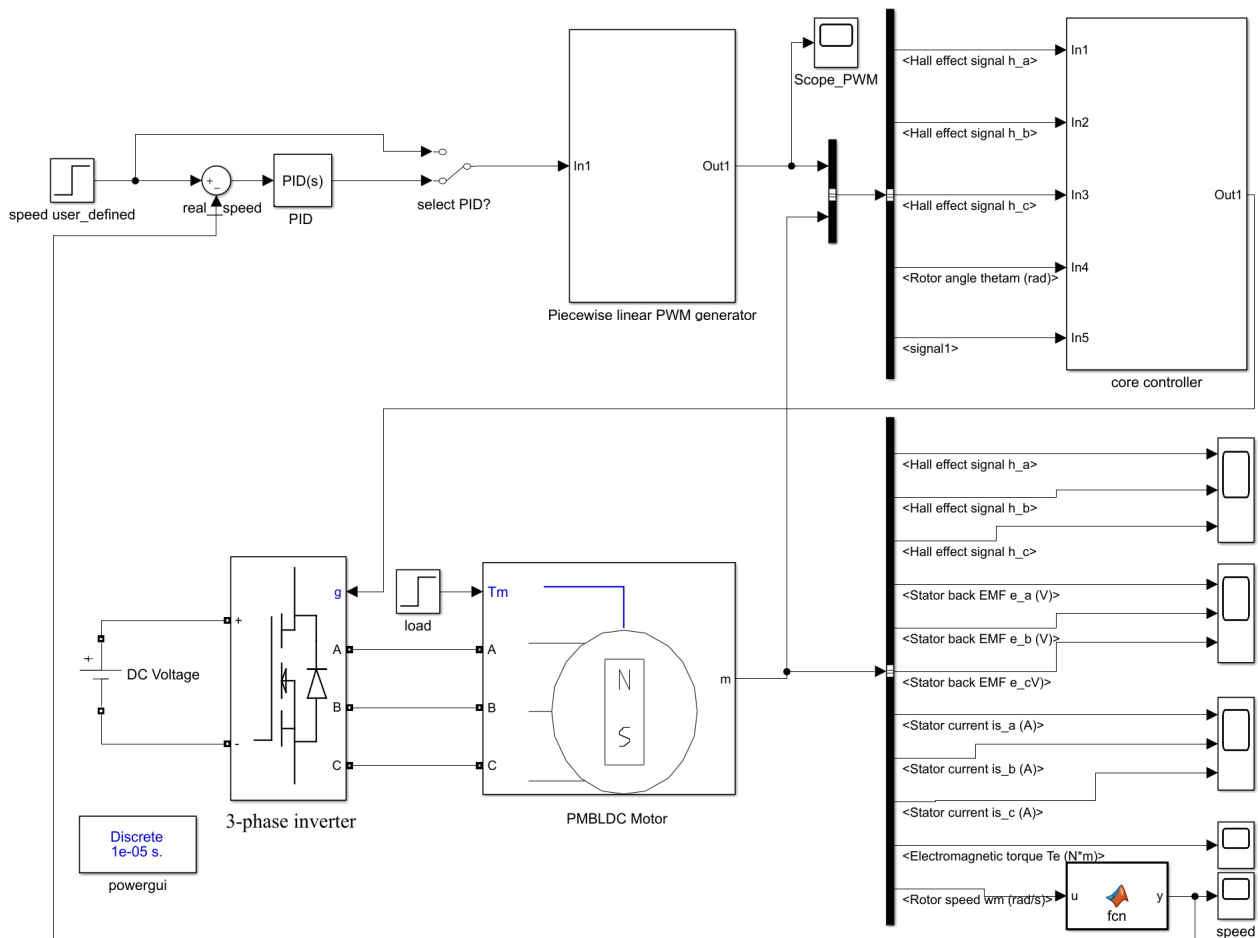


Fig. 3 Simulation model of PMBLDC motor

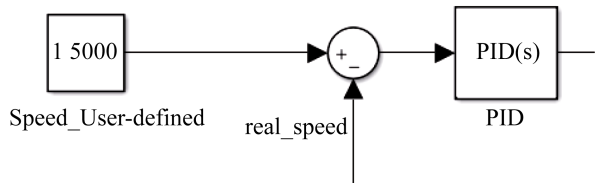


Fig. 4 Speed controller

The speed control loop adopts typical PID control. The given speed is compared with the actual motor speed to obtain the deviation value, which is used as the input of the PID regulator. After PID adjustment, it is input to the piecewise linear PWM generator module.

2.2 Piecewise linear PWM generator

The piecewise linear PWM generator is shown in Fig. 5. The piecewise linear module is determined by testing the motor speeds corresponding to multiple sets of PWMs with different duty cycles in an open-loop state, so that the PWM duty cycle corresponding to different speed is linearly fitted. As shown in Fig. 6, the PWM generator can generate a PWM waveform with a period of 1ms with different duty cycles by receiving the signal from the DC input port.

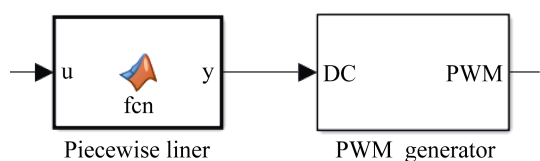


Fig. 5 Piecewise linear PWM generator

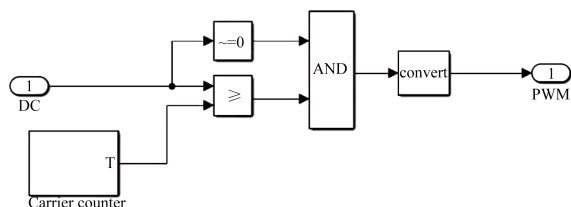


Fig. 6 PWM generator

2.3 Core controller

The core control system collects input data such

as Hall sensor input, PWM and rotor electrical angle to provide control signals for the system. It should generate a modulated PWM signal to control the power switch in 3-phase inverter.

For star-connected motors, the entire working process can be divided into six modes^[5-6]. For each stage, two of the three states are conductive, and the third is open. In the presence of a Hall sensor, commutation is based on the input of the Hall sensor, and the order of how the coil should be powered is shown in Tab. 1.

Tab. 1 Clockwise sensor and drive bits by phase order

PHASE	Hall sensors			Active switch					
	C	B	A	C high	C low	B high	B low	B high	B low
1	1	0	1	0	1	0	0	1	0
2	1	0	0	1	0	0	0	0	1
3	1	1	0	1	0	0	1	0	0
4	0	1	0	0	1	1	0	0	0
5	0	1	1	0	0	1	0	0	1
6	0	0	1	0	0	0	1	1	0

The interior of the module is shown in Fig. 7, which uses the H_PWM-L_ON PWM modulation mode. The commutation logic part is designed based on the Matlab function.

2.4 3-phase inverter

The 3-phase inverter actually transmits the PWM signal from the control system to the motor^[7]. The control system generates a low-voltage signal (up to 5 V), and the motor requires high voltage power supply (usually 20~400 V^[8] according to the motor usage area). According to the type of motor, the inverter bridge components are selected to meet the requirements of voltage and switching speed. Fig. 8 shows the standard six-switch three-half bridge system which is a typical inverter bridge used for PMLDLC motor control.

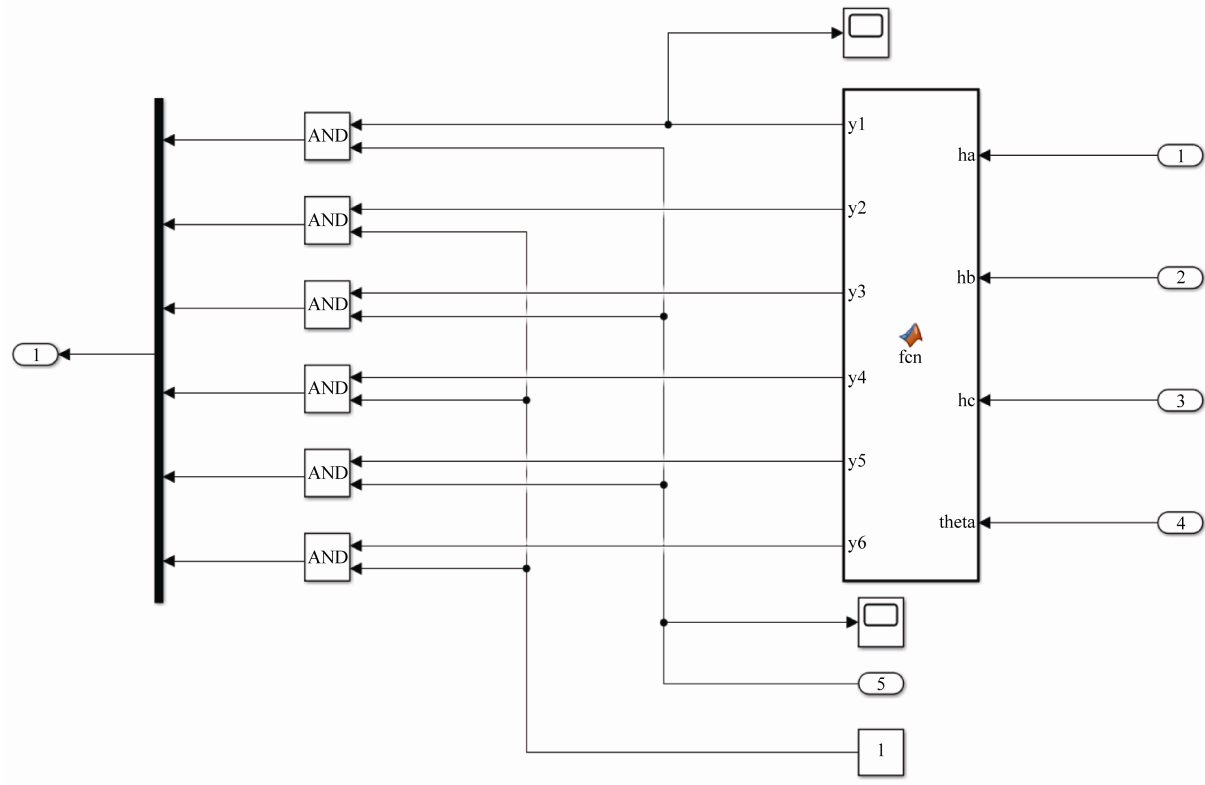


Fig. 7 Interior of core controller

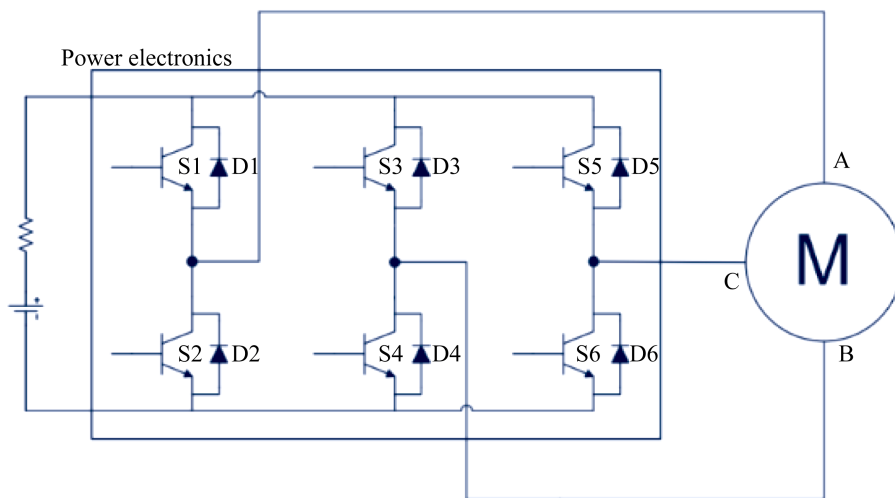


Fig. 8 Typical inverter drive system for a PMBLDC motor

3 Simulation results and experimental verification

3.1 Simulation parameters

The parameters of the motor used in the modeling process are: motor stator phase winding resistance $R=0.0285\ \Omega$, stator phase winding

inductance $L=0.000395\ \text{H}$, torque constant $T=0.582$, rotational inertia $J=0.0027\ \text{kg}\cdot\text{m}^2$, damping coefficient $B=0.0004924\ \text{N}\cdot\text{m}\cdot\text{s}/\text{rad}$, rated speed $n=20000\ \text{r}/\text{min}$, pole pair number $p=4$, DC power supply voltage is $200\ \text{V}$.

The three parameters of the discrete PID controller in the speed loop are $K_p=3.2$, $K_i=195$, and

$K_d=0.001$. The sampling period of the PWM generator is $1e-6$ s.

3.2 Sudden increase in motor load

Simulation environment setting: set speed $\omega=12\ 000$ r/min, load $T_L=2$ N·m when the motor starts, when $t=0.5$ s, load suddenly increases to $T_L=6$ N·m, and simulation time is set to 1 s.

The torque waveform of PMBLDC motor in this system is shown in Fig. 9. The torque fluctuation is very large in the start-up stage, and the positioning process is basically complete until 0.003 5 s. Then the torque level gradually stabilizes. During 0.003 5~0.5 s, the torque is mainly distributed around 2 N·m, while the applied torque is 2 N·m. At 0.5~1 s, the torque is mainly distributed around 6 N·m, while the applied torque is 6 N·m. The software model simulation proves the effectiveness, rationality and stability of the simulation system modeling.

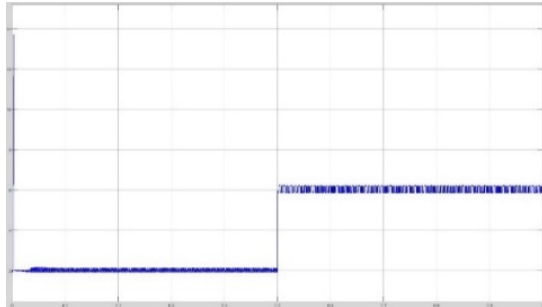


Fig. 9 Torque waveform

The three-phase currents of A, B and C of PMBLDC motor are shown in Fig. 10. As demonstrated Fig. 10, in the initial stage of starting, the rotor starts to accelerate rapidly from 0 s, the current increases rapidly, and the sharp change of current can be reflected in the figure. The rotor begins to accelerate slowly, and the increasing speed of the current gradually slows down. After 0.07 s, the current alternately appears on the horizontal axis and runs steadily, thus proves the conformity of current

waveform to the theoretical analysis.

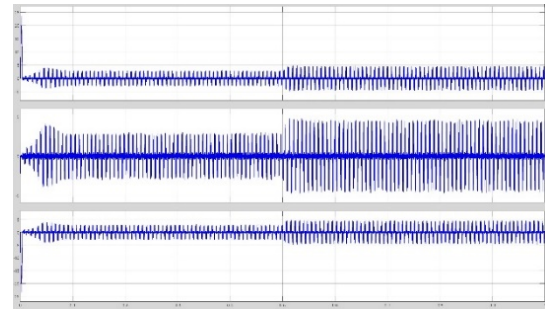


Fig. 10 Three-phase currents

It can be seen from Fig. 11 and Fig. 12 that the back-EMF of the three-phase winding of the motor obtained by the piecewise linear method differs from the angle of the three-phase Hall signal by 120° , which is consistent with the situation of the real motor.

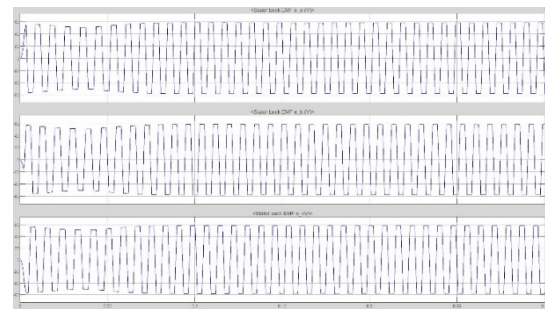


Fig. 11 Three-phase back-EMF

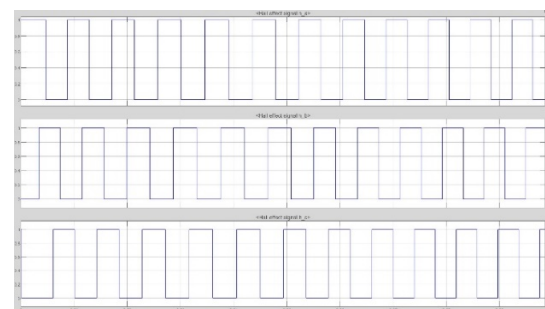


Fig. 12 Three-phase Hall signal

PMBLDC motor speed response is shown in Fig. 13. It can be observed from the figure that when the system starts to run, the motor can reach 12 000 r/min at 0.07 s, and the system response is fast and stable. When the load suddenly increases from

2 ~ 6 N·m at 0.5 s, the speed drops to a certain extent, but the speed returns to the given value with the impact of regulator in 0.04 s. Although there is a small range of fluctuations, the fluctuation range is only 5 r/min, indicating that the system has good stability.

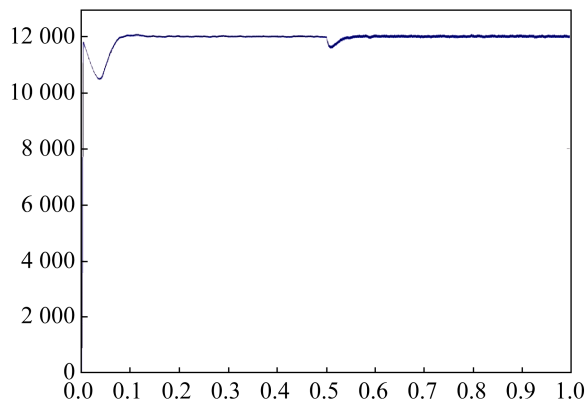


Fig. 13 Speed response

3.3 Sudden increase in motor speed

Simulation environment setting: set the motor load $T_L=6$ N·m. When the motor starts, the given speed is 6 000 r/min. When $t=0.5$ s, the speed increases suddenly to 12 000 r/min, and the simulation time is set to 1 s.

Fig. 14 and Fig. 15 show the motor torque and three-phase current output. When the speed of PMBLDC motor increases suddenly. It can be seen that when the voltage of the three-phase inverter terminal and the motor load are constant, the speed of the motor suddenly increases, which will lead to the phase current to increase. When the motor reaches stability, the phase current and motor torque will decrease rapidly again.

The three-phase winding back-EMF and three-phase Hall signals of PMBLDC motor are illustrated in Fig. 16 and Fig. 17. It can be seen from the figure that at 0.5 s, the motor speed suddenly increases.

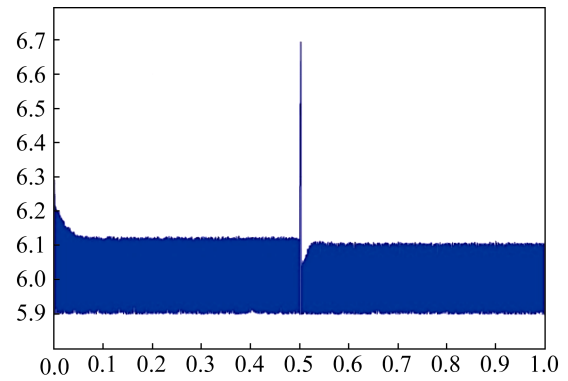


Fig. 14 Torque waveform

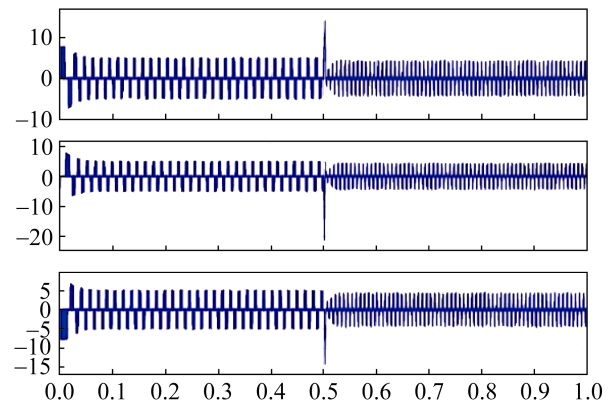


Fig. 15 Three-phase currents

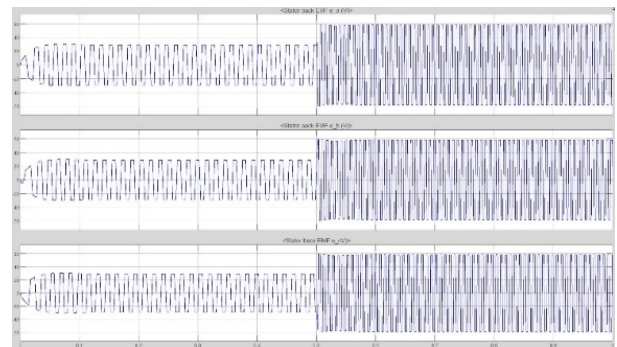


Fig. 16 Three-phase back-EMF

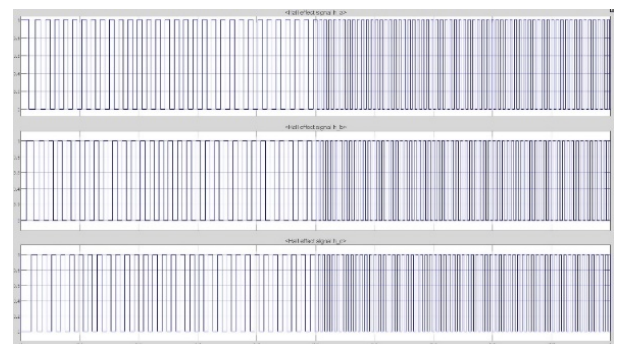


Fig. 17 Three-phase Hall signal

The speed of PMBLDC motor is shown in Fig. 18. After 0.5 s, the motor speed suddenly increased from 6 000~12 000 r/min just take up about 0.05 s. The system responds quickly with little static error.

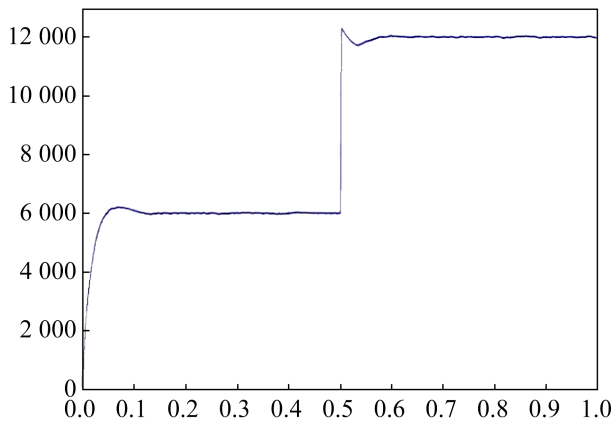


Fig. 18 Speed response

4 Conclusion

In this paper, a PMBLDC motor closed-loop measurement and control system is simulated and modeled in Simulink. The piecewise linear method is used to generate PWM control signals, and the H_PWM-L_ON mode is employed to modulate the PWM. Then, the speed and load are increased suddenly to simulate, analyze and verify the effectiveness of the model. This research provides a way for designers to effectively grasp the graphical modeling tools and understand the dynamic process of motor PWM speed regulation. In addition, it is convenient to use Simulink's plug-ins to compile and download this model into ZYNQ for real-time

hardware-in-the-loop simulation measurement and control.

Reference:

- [1] Sundep S, Singh B. Robust Position Sensorless Technique for PMBLDC Motor[J]. IEEE Transaction on power Electronics (S0885-8993), 2018, 33(8): 6936-6945.
- [2] Abounaga A, Emadi A. A Novel Low-cost High-performance Single-phase Adjustable-speed Motor Drive Using PM Brushless DC Machines[C]. 6th IEEE Conference on Industrial Electronics and Applications. Anaheim, USA: IEEE, 2004: 2102-2105.
- [3] Rodriguez F, Emadi A. A Novel Digital Control Technique for Brushless DC Motor Drives[J]. IEEE Trans. Ind. Electron (S0278-0046), 2007, 54(5): 2365-2373.
- [4] Bhavsar A R, Patil S V. Advance Speed Control Technique of Permanent Magnet Brushless DC Motor Drive Using MATLAB Simulation and FPGA Controller[C]. 2018 International Conference on Smart Electric Drives & Power System. Nagpur, India: IEEE, 2018: 388-391.
- [5] Giridharan K, Gautham R. FPGA Based Digital Controllers for BLDC Motor[J]. International Journal of Engineering research and Applications (S1542-7390), 2013, 3(2): 1615-1619.
- [6] Ma Z, Gao J, Kennel R. FPGA Implementation of a Hybrid Sensorless Control of SMPMSM in the Whole Speed Range[J]. IEEE Trans. on Industrial Informatics (S1551-3203), 2013, 9(3): 1253-1261.
- [7] Kuruvilla J, Deepu K, George B. Speed Control of BLDC Motor Using FPGA[J]. International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering (S2320-3765), 2015, 4(4): 1-6.
- [8] Giridharan K K, Gautham R. FPGA Based Digital Controllers for BLDC Motor[J]. International Journal of Engineering Research and Applications (S0020-7225), 2013, 3(2): 1615-1619.